


## Operating Instructions

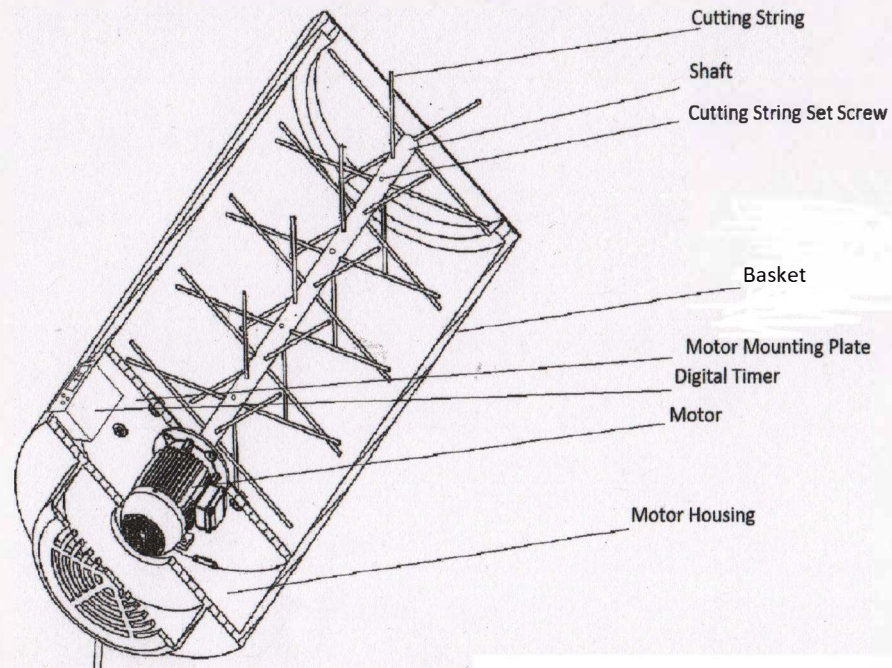

1. Remove position pin and rotate barrel upright.
2. Fill material housing with product.
3. Replace safety lid and position pin.
4. Plug in machine.
5. On timer, during stand by mode, press SET and "0" will be shown on the display.
6. Modify the time interval with the "up" and "down" keys.
7. Press "SET" to enter time, and machine will start.
- 8. Remove Tray and empty into desired container**
- 9. Remove sifted material from basket.**
- 10. Repeat steps 2-9**

## Maintenance

- Periodically blow out motor and material housing with air.
- Use ammonia free cleaner on safety lid.
- Clean material housing with alcohol before storage.

