

Li'l T Dry Flower Trimmer Assembly Instructions

Package Contents:




1. Motor Housing
2. Cylinder Shaft Assembly (black)
3. Cylinder Door Assembly (clear)
4. Triangle Base
5. Power Supply
6. Flexible Trim Collection Tray
7. Trim Balls
8. Cylinder Fasteners
9. Motor Housing Base Screws

Cylinder Assembly

1. Lay cylinder skin black side up on a flat surface.
2. Position black cylinder shaft assembly with shaft facing out.
3. Position clear cylinder door with magnetic door facing out. (remove protective film from assembly assembly before cylinder assembly.)
4. Roll cylinder skin around shaft assembly and door assembly.
5. Insert cylinder skin screws.
6. Set assembled cylinder aside.

Motor Housing Base Assembly

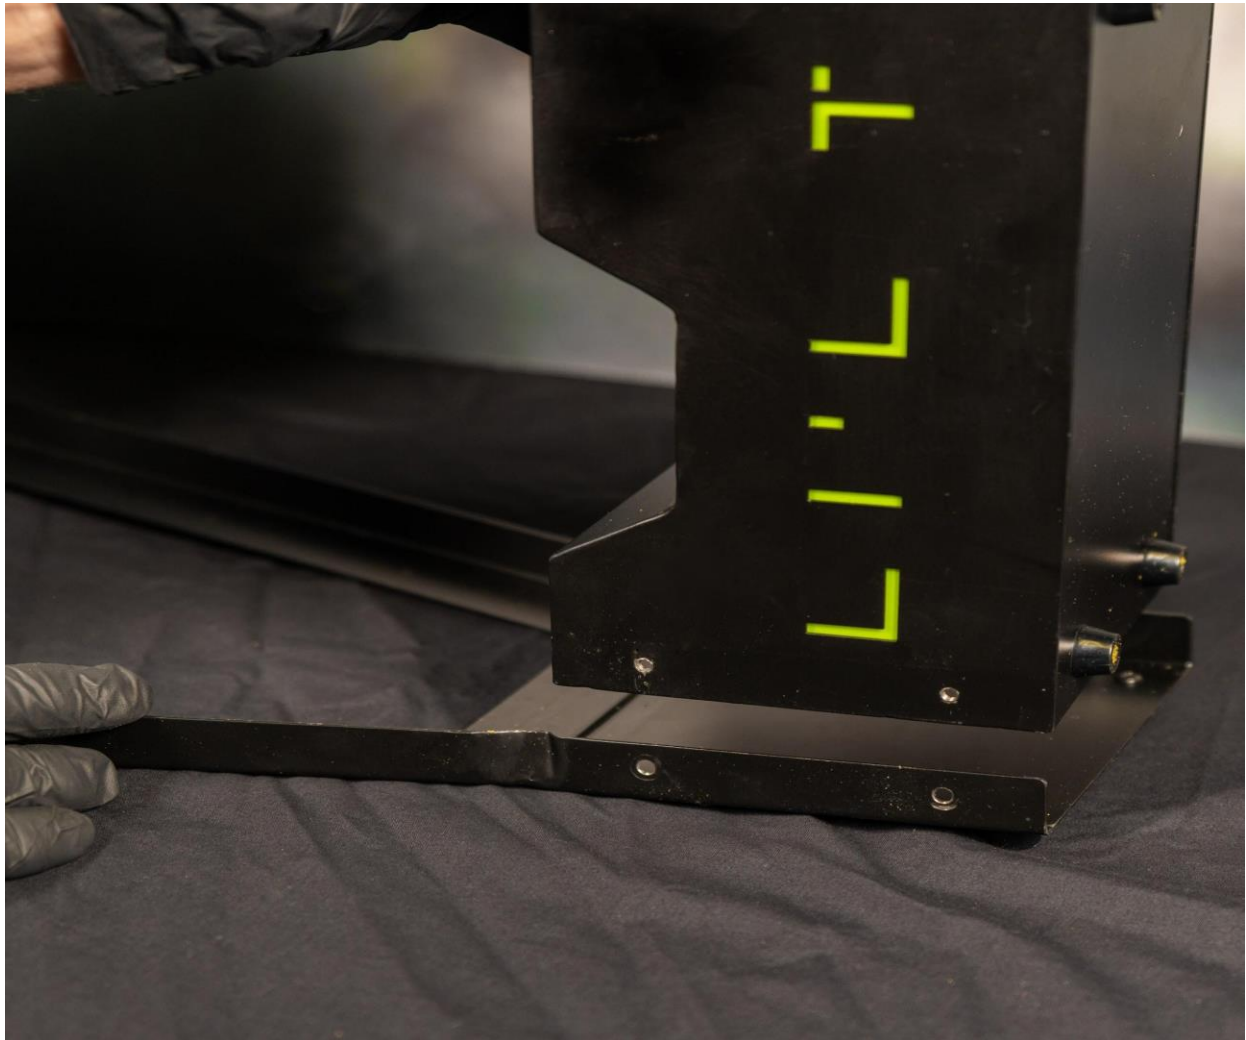

1. Lineup holes in triangle base with holes in bottom of motor housing..



1. Insert the 4 provided screws in base.

Cylinder Drum to Motor Assembly



1. Lay motor down on back feet. Insert shaft into motor housing. Slowly turn cylinder clockwise until shaft drops onto receiver pin. Once shaft drops on to receiver pin, seat cylinder drum firmly in place. Cylinder is now ready for loading and trim operatio

