


SPECIFICATIONS

Item #902681

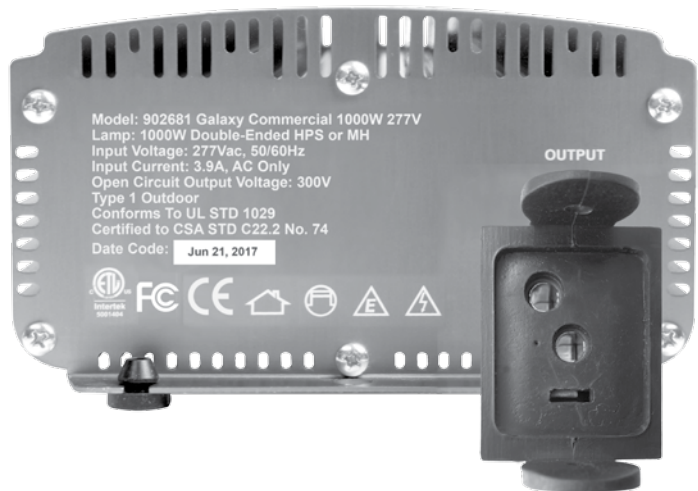

GALAXY®

This document is not intended to be used for installation purposes. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

Galaxy® Commercial Ballast 1000 Watt 277 Volt

• = yes

•	ETL LISTED
Tested to UL Standard #1029 Tested to CSA Standard C22.2 No. 74	
•	FCC CERTIFIED
LAMP COMPATIBILITY	
•	HPS - Max. Wattage: 1000 (double-ended)
•	MH - Max. Wattage: 1000 (double-ended)
TRANSFORMER VOLTAGE	
	120 / 240
	208 / 240
•	277 ONLY
	480 ONLY
AMPS AT 277V POWER: 3.9	
POWER SOURCE Hz: 50/60	
POWER FACTOR (cosϕ): > 0.99	
AMBIENT TEMPERATURE: 40°C	
TOTAL HARMONIC DISTORTION: < 10%	
POWER CORD	
	DETACHABLE 240 VOLT
•	HARD WIRED 277 VOLT w/ L7-15p TWIST LOCK PLUG
	HARD WIRED 480 VOLT - WIRE ONLY (NO PLUG)
LAMP CORD RECEPTACLE COMPATIBILITY	
	DUAL UNIVERSAL
•	SUN SYSTEM ONLY
WARRANTY	
•	2 YEAR
	3 YEAR
	5 YEAR