
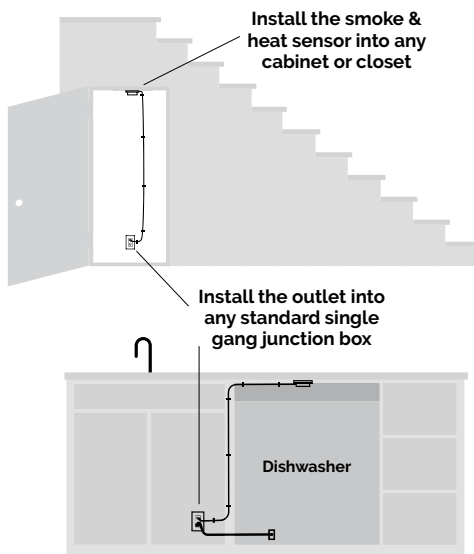


Docking Drawer®

Fire Guard Outlet

6015-4000W

**STOP
APPLIANCE
FIRES
BEFORE THEY START**

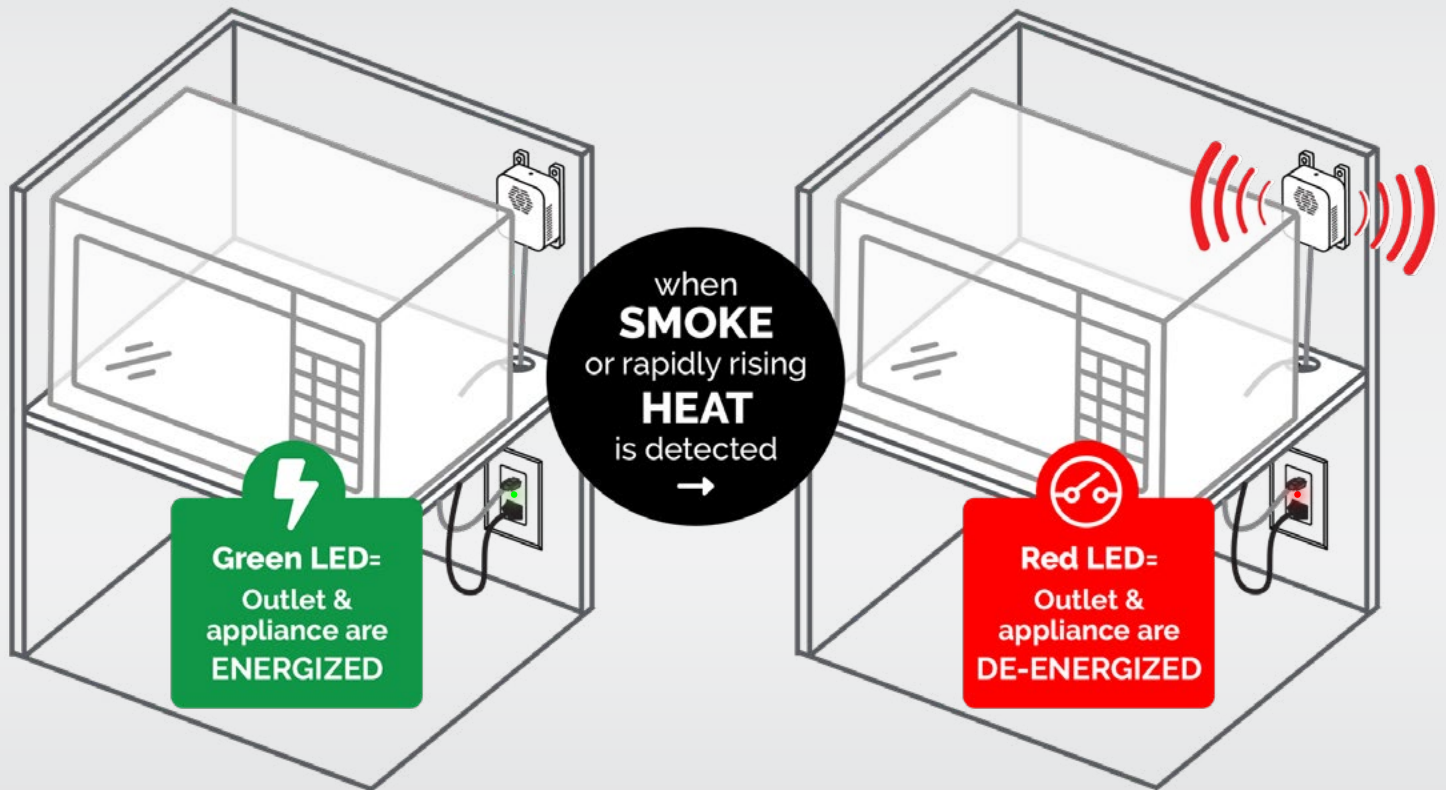

Ex: Connect your dishwasher to the outlet, and locate the smoke and heat sensor between the dishwasher and countertop.


Docking Drawer's Fire Guard Outlet is a single gang electrical outlet featuring one NEMA 5-15 receptacle and one interlock switch connector, as well as a smoke and heat sensing unit. The smoke & heat sensor mounts inside enclosed spaces to de-energize the outlet if smoke or heat is detected. Possible applications include:

- Microwaves
- Dishwashers
- Appliance Garages
- Gas Dryers
- 3D Printers
- Battery Charging Stations
- AV Closets
- General Closets
- Or any place where devices are plugged in and left unattended

Outlet Specs



- Interlock Switch Connector**
- LED Indicator**
- NEMA 5-15 Receptacle**
- Mounting Bracket**

Input	100 - 125 VAC, 50/60 Hz
AC Output	15A@125VAC, 1875 VA MAX
DC Output	24VDC @ 100mA MAX
DC Power Supply	IEC Class II
Number of Receptacles	(1) NEMA 5-15R
Tamper Resistant	Yes
LED Indicator	Yes
Conformance	 UL60730, UL498, EN61558, EN60730, EN62386, CSA C22.2#42
Environmental	-10 °C to +50 °C, non condensing
Warranty	2 Years

Smoke and Heat Sensor Specs



- Smoke and Heat Sensor**
Installs in enclosed spaces like closets and cabinets with 4 screws.
- Outlet Connector**
Connects to the Fire Guard Outlet.
- Low Voltage Cable**
10ft long

Type of Sensor	Smoke and heat sensor
Cable	10 ft low voltage cable
Sensor Length	<i>between mounting holes: 3.4"</i> (86.1 mm)
Sensor Width	<i>between mounting holes: 1.8"</i> (46.5mm)
Sensor Height	1" (25.4mm)
Smoke Sensitivity	1.06 ± .26% per foot
Temperature Alarm	Fixed set point 54°C ± 2°C (129°F ± 4°F) and ≥ 10°C (18°F) per minute temperature rise
Audible Alarm	Yes
LED Indicator	Yes
Mounting Details	Use 4 screws to mount near the appliance or device that will generate smoke or heat, positioning as high up as possible or above the smoke or heat source.
Conformance	The Fire Guard Outlet is ETL approved as an Interlock device. The smoke and heat sensor is not UL or ETL approved and is not for life safety. The smoke and heat sensor is intended for supplementary protection and does not take the place of an approved smoke detector, as required by code.
Warranty	2 Years

Resources & Downloads

Docking Drawer provides all of the necessary resources to plan a Fire Guard Outlet installation. Download Installation Manuals at dockingdrawer.com/downloads

Ready to Order?

Source directly from Docking Drawer or from one of our distribution partners. [Learn more.](#)

Project Name:

Where to Source: Docking Drawer Distributor

Freight - FOB San Ramon Warranty - 2 Years [Terms & Conditions](#)