



FLEXSTAR[®]

645W PRO LED GROW LIGHT

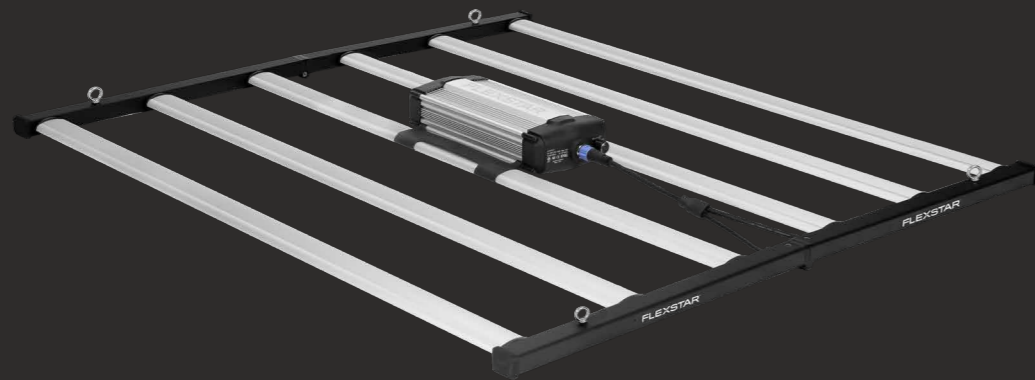


FLEXSTAR[®]

645W PRO LED GROW LIGHT

Light Source	Samsung 301B/301H & OSRAM
Spectrum	Full spectrum
PPF	1800 $\mu\text{mol/s}$
Efficacy	2.8 $\mu\text{mol/J}$
Frequency	50/60 Hz
Input Voltage	120V 208V 240V 277V
Input Current	5.38A 3.10A 2.96A 2.33A
Input Power	645W
Fixture Dimensions	47.6"L x 43.6"W x 4.1"H 121cm x 110.8cm x 10.5cm
Weight	14.8kg/32.6lbs
Temperature Ambient	35°C/95°F
Mounting Height	$\geq 6"$ Above Canopy
Thermal Management	Passive
External Control Signal	RJ Connector
Dimming Option	40%/50%/60%/80%/100%
Light Distribution	120°
Lifetime	L90: >54000hrs
Power Factor	>90%
Waterproof Rate	IP66
Warranty	5-year Warranty



FLEXSTAR[®] 645W PRO

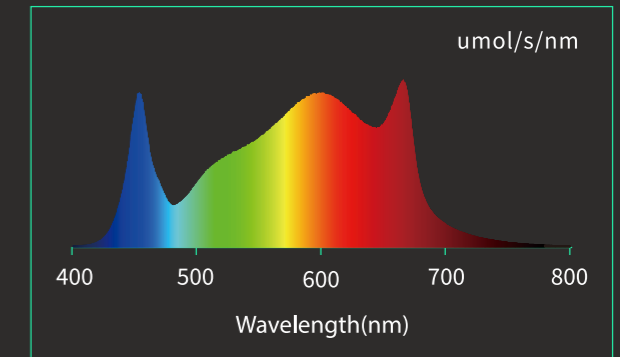

CONTACT US

UNITED STATES OFFICE
1320 S Baker Ave Suite B Ontario CA 91761

sales@flex-star.com
www.flex-star.com
Powered By SINOWELL

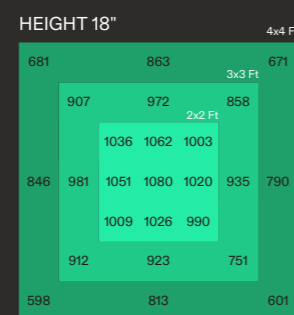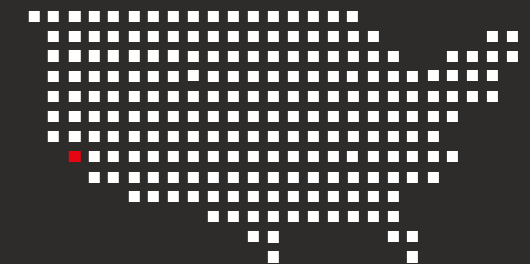

SPECIFICATIONS:

- More than 50% higher in PPF compared with HID lamps
- Energy saving with 37% lower power consumption than HID lamps
- Slim design that is foldable up to 180 degrees, making it small, compact, and easy to install
- Compatible with SINOWELL Zeus Controller
- Dimmable: 0-10V Dimming
- IP66 Waterproof
- 5-year warranty

