



Project: _____

Type: _____

Comments: _____

Prepared by: _____

315W 120~277VAC CERAMIC METAL HALIDE (CMH) ELECTRONIC BALLAST

FEATURES

- Operates all 315W CMH lamps
- Soft Start stabilizes start-up loads and extends lamp life and performance
- LED status displays voltage and wattage in normal operation
- 6' 120VAC power cord provided
- 120/208/240/277VAC voltage sensing input
- Standard S-Type lamp connector
- UL Listed for damp location
- Three (3) year warranty

PROTECTIONS

- Short Circuit
- Open Circuit
- End of Lamp Life (EOL)
- Hot-Start
- Ignition Failure
- Overheat
- Over/Under Voltage

PERFORMANCE

Rated Voltage: AC90-305VAC

Input Frequency: 50/60Hz

Ambient Operating Temperature (TA): -25°C~50°C


Crest Factor (CF): <1.5

Power Factor (PF): ≥0.95

Total Harmonic Distortion (THD): <20%

Current Draw: 3.84A @ 120VAC, 1.42A @ 240V, 1.23A @ 277VAC

DIMENSIONS

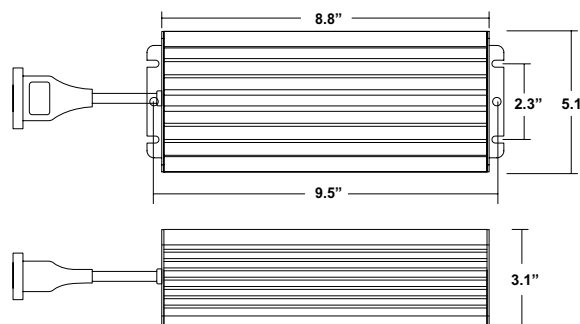

Dimensions: L 8.8" x W 5.1" x H 3.1"

Packaged Weight:

6.25 lbs / 2.8 kgs

Installed Weight:

5.5 lbs / 2.5 kgs

Item No. GLB-315-A-120/277



*Lamps and reflectors sold separately

GROWLITE.COM

7885 N Glen Harbor Blvd
Glendale, Arizona 85307
800.533.3948

Specifications are subject to change without notice.