

## Gavita<sup>®</sup> RS 1900e LED

### FIXTURE PART NO: HGC906410

The Gavita<sup>®</sup> RS 1900e produces 1900  $\mu\text{mol s}^{-1}$  PAR and an impressively efficient 3.0  $\mu\text{mol/j}$  and delivers a broad white light with an enhanced blue spectrum, which some studies show may intensify secondary metabolites, such as terpenes and cannabinoids. This powerful, full-spectrum light source is intended for full-term plant growth - from the vegetative stages to higher-light-requiring bloom and finishing stages. Using the Gavita Master EL3 Controller (*sold separately*), the fixture is dimmable to 10%. The RS 1900e is built with high-quality components, including a Gavita broad range driver and custom made Gavita diodes, to deliver the performance and lifespan you expect from the name you trust.


### FEATURES:

- Broad white light with an enhanced blue spectrum, which some studies show may intensify secondary metabolites, such as terpenes and cannabinoids.
- Dimmable down to 10% with the Gavita EL3 Master controller (*sold separately*)
- A light weight, 6-bar design built off the platform of the Gavita Pro RS 2400e LED to deliver high output and efficiency
- Premium Gavita diodes and drivers
- Embedded adapter for maximum controllability with the Gavita EL3 Master controller (*sold separately*)
- IP66 wet rating and ANSI/CAN/UL 8800 compliant
- 5 year limited warranty\*\*
- Gavita broad range driver to accommodate a larger voltage range of 208 - 480 V

### QUICK SPECIFICATIONS:

- Model No. HGC906410
- Volt: 208 - 480 V
- Frequency: 50/60 Hz
- ETL Listed
- Watts: 650 W
- Current at 208 V: 3.12 A
- Current at 480 V: 1.35 A
- Max Ambient Temp: 40° C
- Dim: 44.8 in x 43.25 in x 3.3 in
- Weight: 27.5 lb

## Color Spectrum

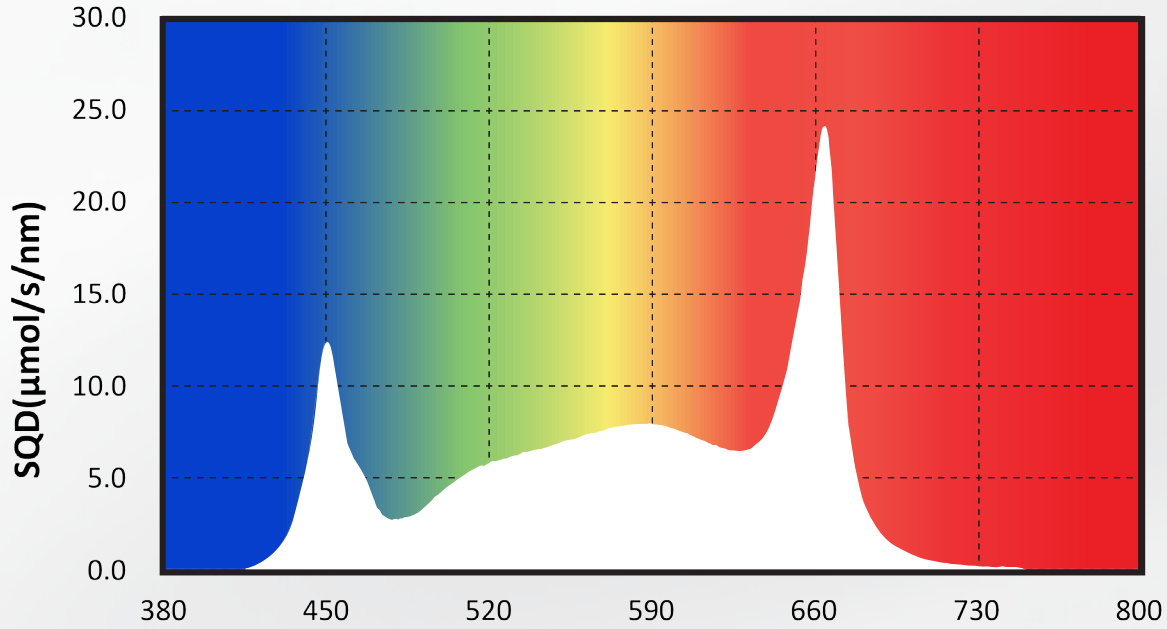

## Uniformity (PPFD Map)

The luminaire was tested with the long axis of the luminaire oriented along the y-axis of the plot.

@ 12inch Measuring Height

275.7	272.3	445.8	589.5	673.6	806.0	473.8	301.4	323.2
279.5	419.8	722.5	1128.5	1324.3	1150.3	758.7	453.3	312.8
279.5	698.8	751.6	1048.9	1168.4	1067.8	788.7	752.9	476.6
551.7	887.6	1021.8	1177.7	1280.7	1199.7	1071.6	1138.5	611.4
625.8	1041.7	1236.5	1702.8	<b>1304.7</b>	1725.8	1277.0	1319.3	684.0
663.7	905.7	1042.7	1198.1	1300.1	1223.3	1105.8	1176.7	626.6
563.7	720.8	775.6	1072.5	1198.5	1104.1	815.3	784.0	495.3
290.2	436.3	748.0	1162.2	1369.3	1196.7	792.8	472.3	327.7
294.0	290.5	468.4	619.0	706.3	639.5	500.7	322.2	343.7

4 Feet X-axis

@ 24inch Measuring Height

187.9	259.7	340.9	413.7	438.2	416.6	347.0	268.6	197.2
256.1	292.3	403.5	509.0	558.2	510.9	410.9	302.3	268.7
256.1	398.6	478.4	630.0	700.4	632.3	487.4	412.1	348.3
400.8	497.6	622.9	718.2	805.5	724.8	634.4	513.8	418.6
426.6	546.2	691.8	805.2	<b>864.4</b>	809.0	701.1	558.2	440.6
407.3	504.8	629.1	724.8	813.9	730.6	645.5	523.6	426.4
407.3	406.5	486.7	638.6	711.0	645.0	497.0	422.4	359.4
263.1	299.4	411.6	516.8	568.7	524.8	422.2	310.4	277.7
193.9	267.4	348.6	423.0	449.4	429.3	358.8	277.9	203.8

4 Feet X-axis

@ 36inch Measuring Height

152.3	192.2	228.9	256.9	268.9	257.4	230.7	195.5	156.8
190.7	243.0	296.2	339.7	355.7	340.2	298.8	247.5	195.9
190.7	294.0	366.3	424.9	445.4	425.5	371.0	299.7	231.9
251.0	335.0	421.6	491.2	520.0	494.4	427.1	341.7	258.0
263.4	351.4	445.1	519.7	<b>548.8</b>	520.7	448.2	356.1	268.6
253.8	337.7	424.5	494.4	522.1	497.3	431.0	345.4	261.5
253.8	297.9	371.3	428.6	453.2	430.5	376.2	304.8	236.9
194.3	247.2	300.8	344.1	361.1	346.5	304.8	252.4	200.6
156.1	195.9	232.4	260.5	273.1	262.9	236.8	200.5	160.9

4 Feet X-axis

@ 48inch Measuring Height


132.0	154.0	173.8	187.5	193.2	187.7	174.4	155.7	134.4
153.2	182.2	206.2	224.3	229.8	224.1	207.3	184.4	156.0
153.2	205.0	235.3	257.4	263.9	257.5	237.4	207.8	175.0
184.7	221.9	255.8	279.5	288.8	280.9	258.4	225.3	188.4
190.8	229.3	263.8	289.1	<b>298.1</b>	289.2	265.0	231.3	193.4
186.1	223.4	257.0	281.0	289.9	282.3	259.8	227.1	189.9
186.1	206.9	237.4	258.9	266.6	259.6	239.3	210.5	178.1
155.3	185.0	208.6	226.7	234.1	227.5	210.6	187.2	158.7
134.3	156.4	176.2	190.1	196.1	191.1	177.9	158.7	137.1

4 Feet X-axis

## Photometric Characteristics

Dimming Value %	Dimming Value% PPF ( $\mu\text{mol/s}$ )	PPE ( $\mu\text{mol/s}$ )
100	1952	2.955
90	1748	2.983
80	1557	3.006
70	1355	3.026
60	1161	3.045
50	966.5	3.056
40	759.3	3.075
30	547.1	3.105
20	344.5	2.972
10	142.6	2.695

## Dimming Curve vs. Efficiency

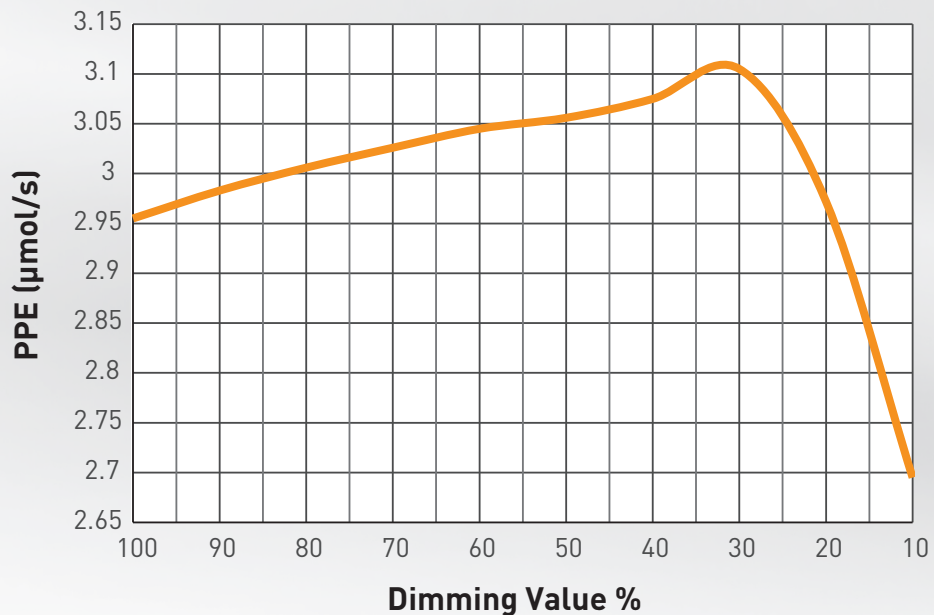

# Gavita® RS 1900e LED Summary

<b>Input Voltage +/- 10%:</b>	208 - 480 V
<b>Input Watts +/- 7%:</b>	650 W
<b>Current:</b>	3.12 - 1.35 A
<b>Heat Load:</b>	2,724 Btu/hr
<b>Frequency:</b>	50/60 Hz
<b>Power Factor:</b>	> 0.95
<b>Rating:</b>	IP66
<b>Dimensions:</b>	43.25 x 44.8 x 3.3 in / 109.9 x 113.8 x 8.4 cm
<b>Certifications:</b>	Conforms to ANSI/UL STD 1598. Certified to CSA STD C22.2 No. 250.0. Conforms to ANSI/CAN/UL STD 8800
<b>Power inlet:</b>	Wieland RST 16i5 connector
<b>External dim:</b>	Gavita EL3 Master Controller
<b>External control signal:</b>	RJ connector (8P6C)
<b>Warranty:</b>	5 Year warranty**

\*\*When purchased from an authorized Hawthorne dealer, this product is covered by a LIMITED WARRANTY, available at [hawthornegc.com/warranties](http://hawthornegc.com/warranties). You can also obtain the Terms of Sale and Limited Warranty by calling Hawthorne toll-free at: 1-888-478-6544 or writing Hawthorne at: Hawthorne Hydroponics LLC, 800 Port Washington Blvd. Port Washington, NY 11050, Attn: Customer Service.

## INCLUDED IN THE BOX:

- Gavita® RS 1900e LED 208-480 V
- Wire Hangers

## ACCESSORIES (Sold separately):

- HGC906174 - Gavita EL3 Master controller
- HGC906708 - Gavita Daisy Chain T-Splitter
- HGC906743 - Gavita Rail System Hanging Bracket
- See website for communication cables options

## POWER CORDS (Sold separately):

- HGC906148 - Gavita 8 ft Power Cord 208-240 Volt for LED
- HGC906458 - Gavita 8 ft Power Cord 277-400 Volt for Gavita LED
- HGC906182 - Gavita 8 ft Power Cord 277 Volt Twist Lock Plug

## HAWTHORNE GROW SOLUTIONS

Hawthorne Gardening Company was purposefully built to serve growers with exclusive and distributed performance-based brands including Agrolux, Gavita, General Hydroponics, Botanicare, Can-Filter, and many more. In addition, Hawthorne has unparalleled distribution capabilities across North America, bold R&D investments, and service solutions that go beyond product. Our goal is to enable growers to seize today's unprecedented opportunities and build the industry of tomorrow.

## TOOLS & SUPPORT

Our team of experts are experienced in horticulture, lighting, environmental control and more, and offers services in every stage of the process – from planning to implementation and tracking to troubleshooting. We are invested in helping you succeed!

## HAWTHORNE HORTICULTURE SERVICES

- Plant Nutrition Services
- Growing Media Services
- Analytical Services

**CONTACT US FOR A FREE LIGHTING LAYOUT: (Tel) 888.478.6544 (Fax) 360.693.1682**



Manufactured for Hawthorne Hydroponics LLC, a subsidiary of The Hawthorne Gardening Company.  
800 Port Washington Blvd. Port Washington, NY 11050  
**HawthorneGC.com | Canada: HawthorneGC.ca**

©2023. World rights reserved.