

LUX-CM315-240

LUXX 315W CMH 120-240V TECHNICAL SPECIFICATIONS



Physical

Ballast Length	171mm 6.75"
Ballast Width	152mm 6"
Ballast Height	101mm 4"
Hood Length	262mm 10.3"
Hood Width	262mm 10.3"
Total Length	500mm 19.75"
Total Weight	3.51kg 7.75lbs

Performance

Input Voltage	120 / 208 / 240V
120V	2.89A
208V	1.60A
240V	1.40A
Input Current	2.89-1.4A
Input Power	343W
Min Power Factor	0.95
THD	<10%
Power Cord	10ft
208-240V	NEMA 6-15P (10ft)


Performance Requirements

Rated Mains Voltage	120-240V
Voltage Range	108-305V
Mains Frequency	50/60Hz
Operation Frequency	140-220Hz

Luxx 315w CMH | Distance From Canopy: 2' | 4x4 Footprint

57				118				57
	130			229				127
		257		360		245		
			447	408	454			
83	175	288	390	388	364	281	170	68
			472	410	450			
		255		361		260		
	131			235			125	
62				125				57

Average PPFD = 243.6

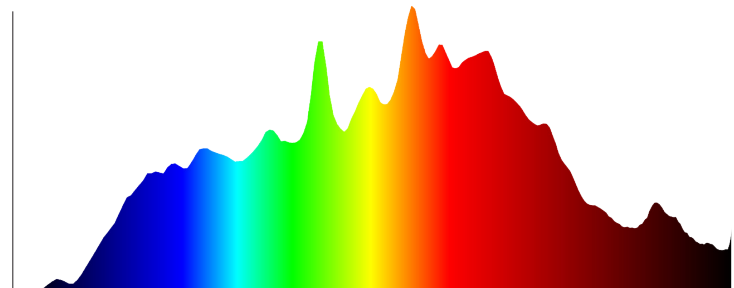

Wavelength (NM) | Luxx 315 CMH 4200k

