

## PERFORMANCE


°F   %RH	80   60	75   50
Water Removal (P/Day)	105	67
Efficiency (P/kWh)	7.5	5.4
Energy Factor (L/kWh)	3.55	2.55



## ELECTRICAL

°F   %RH	80   60
Supply Voltage	120V
Current Draw	5.0A
Recommended Breaker Size	15A
Power	540W
Power Cord	9', 115 VAC, Ground
CFM	280
BTU (Total)	6,800
BTU (Heat of Condensation)	4,800
BTU (Motor Load)	2,000

## DIMENSIONS

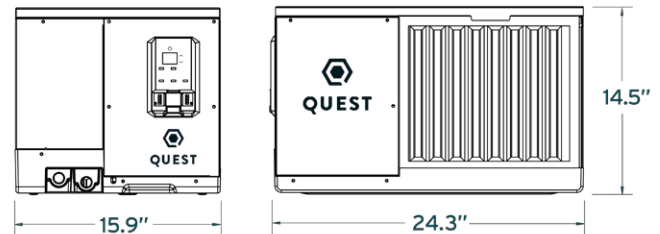

## SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R410a
Refrigerant Amount	1 lb 7 oz
Weight	60 lb
Air Filter MERV Rating	MERV-13
Dimensions	12" x 14" x 1"
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	56 F Min - 95 F Max

## FEATURES

- + **Patented M-CoRR Technology:** Achieves the highest efficiency available in the market
- + **Onboard Digital Control,** with low voltage terminal block for optional external control
- + **Superior MERV-13 Filtration:** Removes more harmful contaminants from the air, such as mold, bacteria, and virus carriers
- + **Removable Access Panel** for easy, in-place maintenance and serviceability
- + **Plug and Play:** Easy and flexible installation options with standard 110-120V outlet and no P-trap requirement.
- + **Auto-Restart** after loss of power

Specifications are subject to change without notice. Drawings are not to scale.