



SS/ACO 96 SERIES

ACO 96 SERIES



Variable Flow Control



SS SERIES




Metal Connectors



- 3.2 to 42 litres per minute
- High efficiency oil free design for contamination free pumping
- Exceptionally low power consumption from just 2W
- Compact ergonomic casing with variable flow control
- Multiple metal outlet options which eliminate the need for manifolds
- Integrated rubber feet to reduce vibration and keep noise levels minimal
- Simple low cost servicing

IDEAL FOR

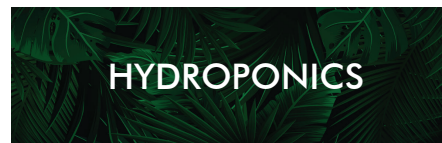

HYDROPONICS



AQUATICS

MODEL	FLOW (Max)	PRESSURE (Max)	OUTLETS	POWER	CONNECTOR	DIMENSIONS
SS3/ACO 9601	3.2 l/min	0.12 bar	1	2W	4mm	136 x 78 x 68mm
SS7/ACO 9602	7.2 l/min	0.12 bar	2	5W	4mm	162 x 100 x 87mm
SS10/ACO 9610	10 l/min	0.15 bar	4	10W	4mm	187 x 145 x 95mm
SS14/ACO 9620	14 l/min	0.15 bar	6	12W	4mm	224 x 163 x 126mm
SS16/ACO 9630	16 l/min	0.15 bar	8	15W	4mm	248 x 176 x 137mm
ACO 9650	42 l/min	0.15 bar	12	18W	4mm	248 x 176 x 137mm

