



THE MOST DOMINANT GROW LIGHT IN THE INDUSTRY

## GAME CHANGING INNOVATION IN COMMERCIAL GROW TECHNOLOGY

### INCREASED HARVEST WEIGHT

Recommended hanging height of only 6-12" allows close proximity to canopy, capitalizing on valuable tiered growing space while maintaining massive coverage

### OPTIMIZED HARVEST QUALITY

Customizable spectrum allows you to match the needs of any plant at any stage of growth. You only need one fixture to get the job done, Seed to Harvest.

### MINIMIZED WASTE

Unique configuration offers the most even PPFD across the entire footprint. Never sacrifice an inch of potential growth across your canopy or deal with troublesome hot spots putting your harvest at risk.

### MAXIMIZED VERSATILITY

Ideal for large scale overhead or vertically racked grow systems. Multiple hanging options fit the needs of any commercial or large scale grow operation.

### PERFECT FOR ANY ENVIRONMENT

Ideal IP65 Rating for commercial applications.




## SPECIFICATIONS

Spectrum	3 Channel - Fully Adjustable*
Efficacy	2.2 $\mu\text{mol}/\text{J}$
PPF	1650 $\mu\text{mol}/\text{s}$
Max. Wattage	750w $\pm 5\%$
Input Voltage	120-277v
Power Factor	0.963 @ 240v
Diodes	384 OSRAM OSOLON SSL
Lifetime	>75,000 Hours
Dimensions	39.4" x 39.4" x 4.3"
RMH (Recommended Mounted Height Above Canopy)	$\pm 12"$
Footprint @ RMH	4' x 4'
Warranty	5-Year

\*With optional GSI-1 Controller

## SPECTRUM

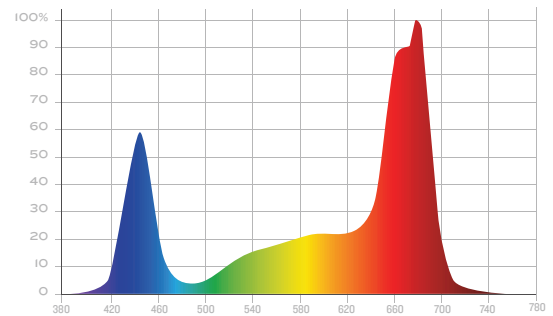

## DIMENSIONS

