


◆ **SPECIFICATIONS**


PPF:	1944 $\mu\text{mol/s}$
Efficacy:	2.7 $\mu\text{mol/J}$
Input Power:	720 W
Power Factor:	$\geq 90\%$
Fixture Dimensions/Weight:	45.24"L x 4.36" W x 6.46" H / 22.33lbs
Mounting Height:	> 2.5ft Above Canopy
Lifetime:	L90: > 54,000 hrs
Warranty:	5 Years Standard Warranty
Input Voltage:	Autosensing 100-277V
Amp Draw:	120V/6.23A, 240V3.09A/277V/2.71A
IP Rating:	IP66

◆ **DIMENSIONS**

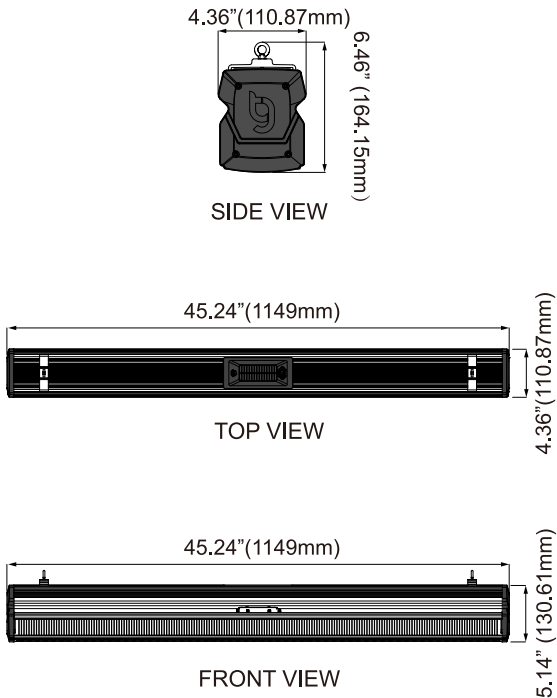

◆ **MODEL-I PLUS (Tested at 2.5 Feet)**

**AVERAGE PPFD 684**

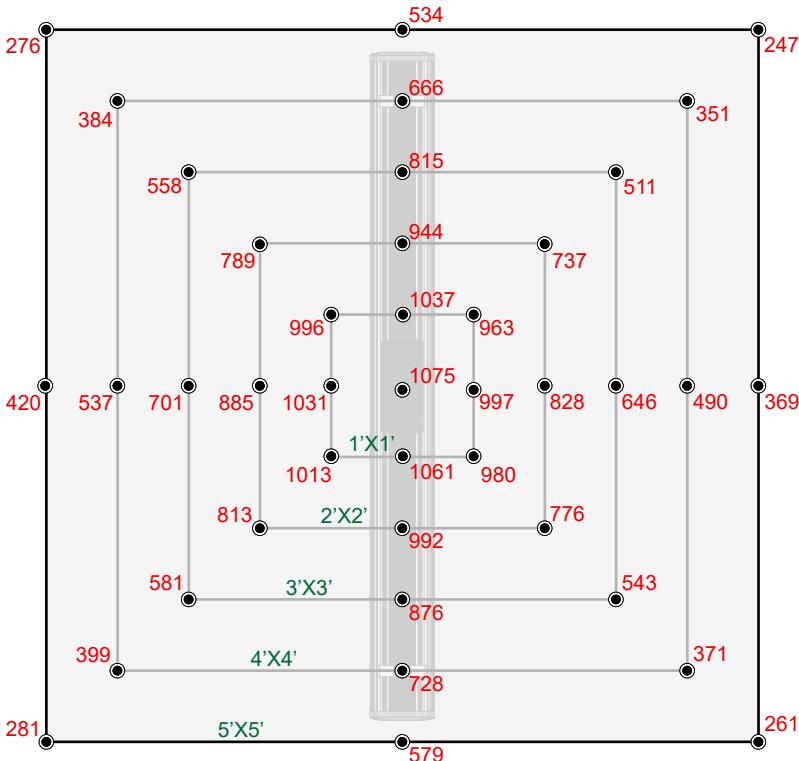

◆ **FEATURES**

- Outstanding Efficiency
- Slim design with built-in driver
- Innovative V-shape LED panel
- Ultimate controllability on UV, White, Deep Red and Far Red channels
- External control ability

◆ **SPECTRA**

Fully Adjustable Spectrum

