EFC-1

EC Fan Control Adaptor

The EFC-1 adaptor is specifically designed for TrolMaster's Tent-X control system. With the use of the EFC-1 adaptor, TrolMaster's Tent-X controller is capable of controlling most fan systems on the market. The EFC-1 uses low-volt control option in order to communicate with the Tent-X and allow the signals to pass through.

You can connect the EFC-1 adaptor simply by inserting the RJ12 cable into the devices line on the Tent-X Controller. Once you connect two EFC-1 adaptors, the Tent-X controller will automatically address the Exhaust Fan (F1) and Intake Fan (F2). You can also select whether your fan is an EC fan or a PWM fan by pressing the button on the adaptor itself. You can then connect the appropriate fans to each of the EFC-1 adaptors. This will then enable you to start controlling your fans using the Tent-X Controller.



Specifications

EFC-1

Input Voltage

Voltage 12V

Max Output: Voltage

Voltage Output: 0-10V, PWM: 50mA

Maximum Current

Current 0.1A

Package Dimensions

Size 6.14"/156mm(L)x 3.27"/83mm(W)x 1.18"/30mm(H)

Gross weight 2.3oz / 67.2g

Working Environments

 Temperature
 32~122°F (0~50°C)


 Humidity
 ≤90%

Package Contents

EFC-1 adaptor 1pc

Link Up

EFC-1

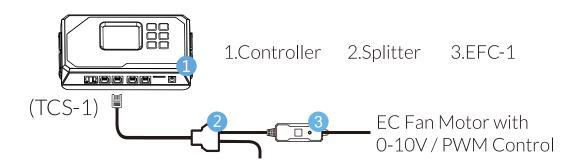

TrolMaster

Email: support@trolmaster.com **Phone:** 877-420-9876