

40 GPM: D40MZ2BPVFHY

PRODUCT DESCRIPTION

The Dosatron **D40MZ2BPVFHY** is perfect for the indoor grower. It's water-powered so no electricity is needed and it includes a union for easy installation into the Nutrient Delivery System. Easy to install and maintain. With flow up to 40 GPM, can be installed in parallel to increase the water flow. 63% fewer parts, metal free piston.



| Dilution Range: | 1:500 to 1:50 (0.2% to 2%) |
|------------------------------|---|
| Ratio Range mL: | 7.5 to 75 mL |
| Ratio Range tsp: | 1.5 to 15 tsp |
| Water Flow Range: | 2.2 to 40 GPM |
| Operating Pressure Range: | 4.3 to 116 PSI |
| Available Housing Materials: | Polypropylene (Standard Blue) |
| Dimensions: | 25 1/4" x 8 1/2" |
| Weight: | 12 lbs |
| Connection Size: | 1 1/2" NPT |
| Maximum Temperature: | 104 ^o F |
| Included Accessories: | 6' clear suction tube, weighted strainer, mounting bracket and operating manual |
| Recommended Accessories: | 200 mesh filter, check valve, pressure regulator, flow restrictor |

MAINTENANCE KITS

Mini-Maintenance Kit (Part#: PJDI120VMINI-H) - For regular maintenance

Injection Seal Kit (Part#: PJDI120V) - For yearly maintenance


Call 800-523-8499 to order the Dosatron for your specific application





40 GPM: D40MZ2BPVFHY

Hi-Flo Nutrient Delivery System Installation

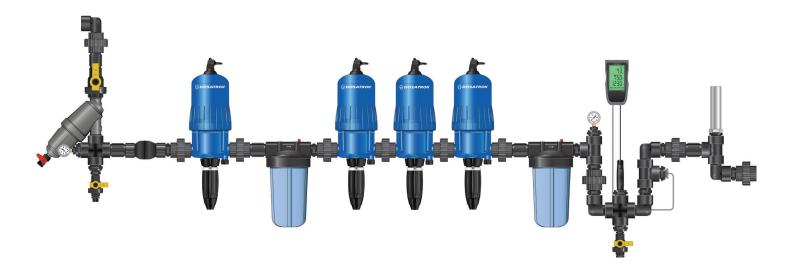

The Nutrient Delivery System is customizable, more dosers can be added as needed.

NOTE: Installation illustrations are to be used as a reference guide only.

Dosatron International 2090 Sunnydale Blvd. • Clearwater, FL, USA 800-523-8499 • www.dosatronusa.com